

#### Description:

This oversized 480/600V frame lockout fits breaker switches up to 70mm Wide and 22mm thick (2-1/4" x 7/8") and is fitted in seconds with thumbscrew mechanism. No tools required.

The device is made of durable polypropylene and glass-filled impact-modified nylon.

This lockout device isolates and secures circuit breaker switches to protect employees against electrical accidents during equipment maintenance.

Equipping your employees with the proper lockout tools and warning devices can save lives and reduce lost employee time.

#### Operation:

Turn the circuit breaker in the off position. Place the lockout device over the switch lever and secure with the thumb screw.



The blade type design applies less force onto the wing screw but makes engagement tighter.

The removable clamping plate (included) further expands the scope of application.

Can use locks with a shackle diameter of 7mm.

Material: Polypropylene & Nylon

Scope: 480/600V Circuit Breakers

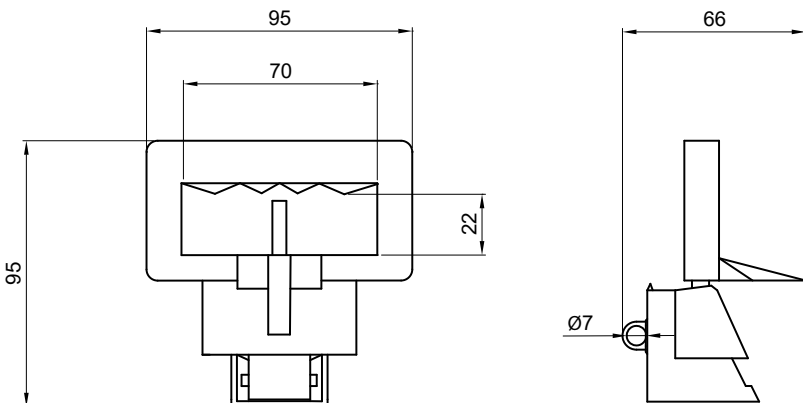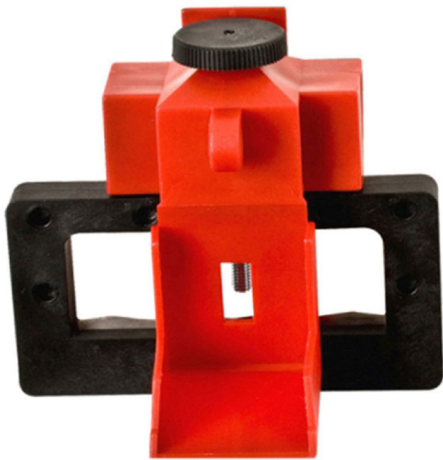

Global Headquarters

Total Lockout (Safety) Ltd  
Unit 10 Warner Drive  
Springwood Industrial Estate  
Braintree, Essex, CM7 2YW  
United Kingdom

Tel: +44 (0)1376 325506  
Fax: +44 (0)1376 347484  
E-mail: sales@totallockout.com

Total Lockout (Safety) LLC  
4600 140th Avenue North  
Suite 180  
Clearwater, FL 33762  
United States of America

Tel: (727) 608-4325  
Fax: (727) 538 4237  
E-mail: sales@totallockout.com

The information provided in this document is for general guidance only. The specifications provided are from the manufacturers information. This document is not intended as a substitute for and is not to be used for determining the suitability or reliability of these products for specific user applications. It is the duty of any such user to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Total Lockout (Safety) Ltd shall not be responsible or liable for misuse of the information contained herein.